


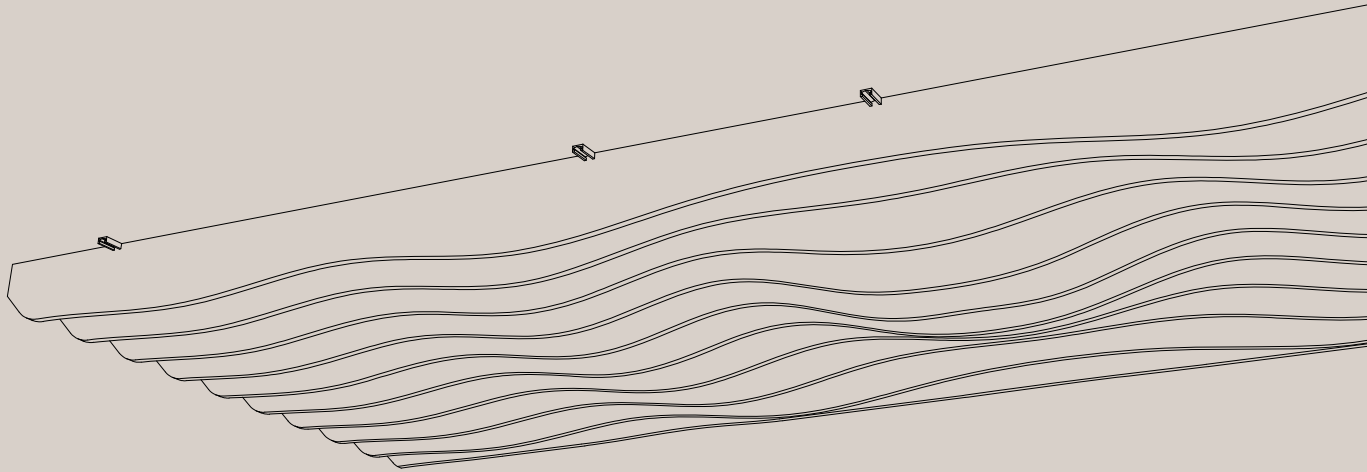


Bespoke Baffle Systems

713.24.10.000.00	713.24.30.000.00	713.24.44.000.00
713.24.11.000.00	713.24.31.000.00	713.24.45.000.00
713.24.12.000.00	713.24.32.000.00	
713.24.13.000.00	713.24.33.000.00	
713.24.14.000.00	713.24.34.000.00	
713.24.15.000.00	713.24.35.000.00	

Bespoke Baffle

General Information

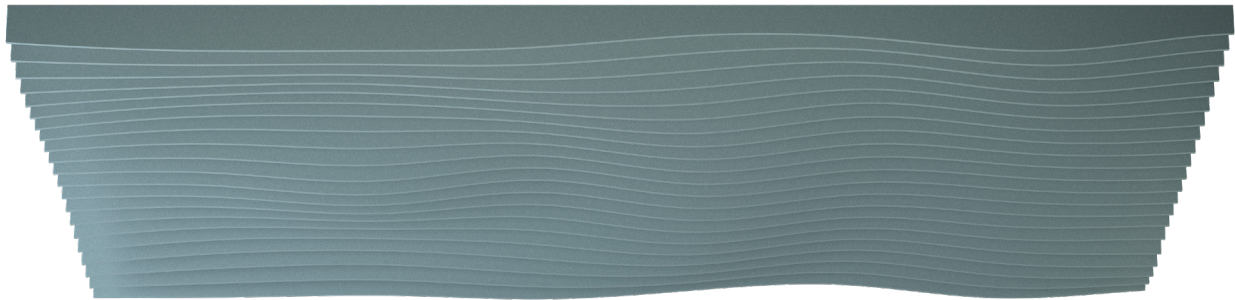


Data

Applicable article numbers

713.24.10.000.00	713.24.14.000.00	713.24.32.000.00	713.24.44.000.00
713.24.11.000.00	713.24.15.000.00	713.24.33.000.00	713.24.45.000.00
713.24.12.000.00	713.24.30.000.00	713.24.34.000.00	
713.24.13.000.00	713.24.31.000.00	713.24.35.000.00	

Dimensions¹


Height range	100-300mm	4"-10"
Spacing range	100-300mm	4"-10"
Material thickness	24mm	0.94"
Length	on demand	on demand



Custom solutions available

Material

Baffles	100% PET (60% post-consumer) in 36 colours.
Strut profiles	Steel (galvanized or powder coated black)




Extended document available

Weight²

Baffles	4kg/m ² (±10%)	0.82 lbs/ft ² (±10%)
Strut profile	0.62kg/m	0.99 lbs/ft

Included

Custom baffles



Suspension system



Installation guide



Design revision



Warranty 10 years³




1 - all dimensions are nominal 2 - all weight values are nominal 3 - Impact Acoustic warranty terms apply

Bespoke Baffle


Specification Guide

Ensure you make the perfect choice by choosing our solutions for your next project. To get started, simply define some basic information and constraints about your space. Then explore our range of standard solutions or contact us directly for a more in-depth discussion of personalised customized options.

1 Prepare this information:



Project Area



Ceiling Plans (RCP)


page 8



Other Considerations


page 8

2 Specify your Baffles:




Height

page 4




Shape

page 5-6



Spacing


page 4



Colour


page 9

3 Select installation method:




Strut track


page 7



Direct Gripper




Gripper + Slotted Baffle



Multidirectional track

Bespoke Baffle


Geometry Information



Reference geometry

Explore the various standard and custom sizes in our product families. See the drawing below for an overview of basic dimensions, modules and ranges.

Customize our **Bespoke** products beyond the presented values - contact us for details.

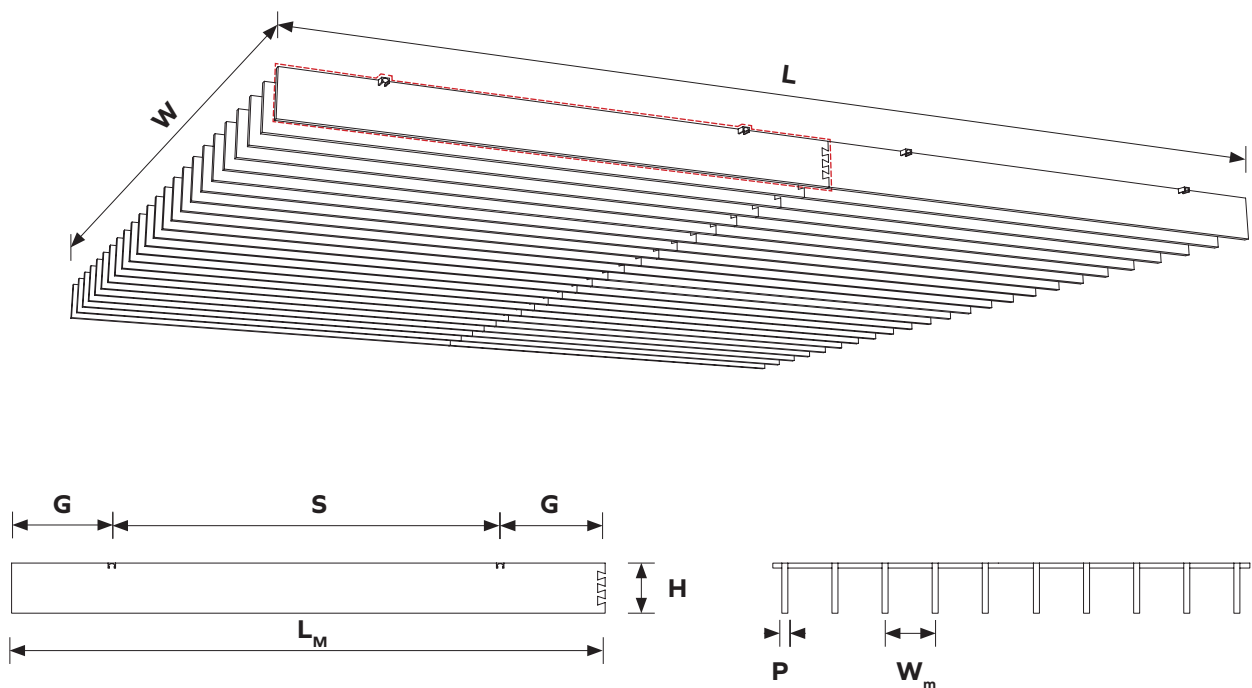

Dimensions table

W	Total width	on demand	on demand	<i>bespoke</i>
W_m	Spacing	100-300mm	4"-10"	<i>standard or bespoke</i>
L	Total length	on demand	on demand	<i>bespoke</i>
L_m	Length module	1600-2400mm	63"-94.5"	<i>standard</i>
G	Overhang	400mm	15.75"	<i>standard</i>
S	Support spacing	max.1600	max.63"	<i>standard</i>
H	Baffle height	100-300mm	4"-10"	<i>standard or bespoke</i>
P	PET material thickness	24mm	0.94""	<i>fixed</i>

Bespoke Baffle

Product Family Overview

1 Bespoke Straight Baffles



Customizable product

713.24.14.000.00 - Baffle Straight Bespoke (H200, S200) (H7.87", S7.87")


713.24.15.000.00 - Baffle Straight Bespoke (H300, S200) (H11.81", S7.87")

713.24.34.000.00 - Baffle Straight Bespoke (H200, S300) (H7.87", S11.81")

713.24.35.000.00 - Baffle Straight Bespoke (H300, S300) (H11.81", S11.81")

713.24.44.000.00 - Baffle Straight Bespoke (H200, S100) (H11.81", S3.94")

713.24.45.000.00 - Baffle Straight Bespoke (H300, S100) (H11.81", S3.94")

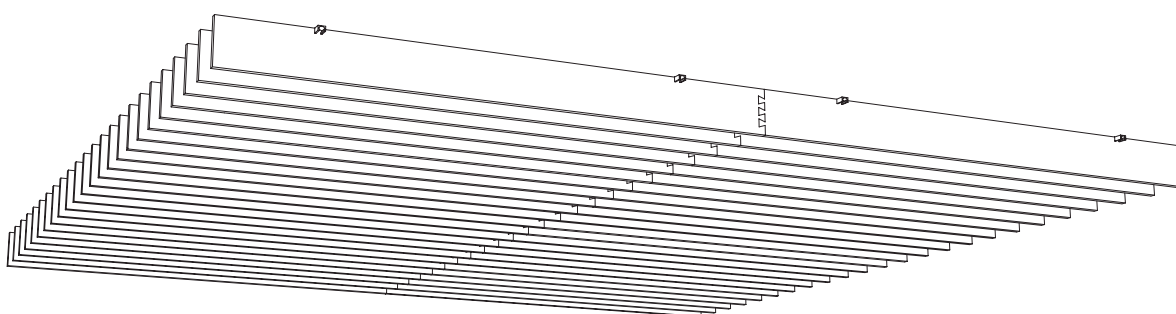


2 Bespoke Edge Baffles



Customizable product

713.24.10.000.00 - Baffle Edge Bespoke (H150-250, S200) (H5.90"-9.84", S7.87")

713.24.30.000.00 - Baffle Edge Bespoke (H150-250, S300) (H5.90"-9.84", S11.81")

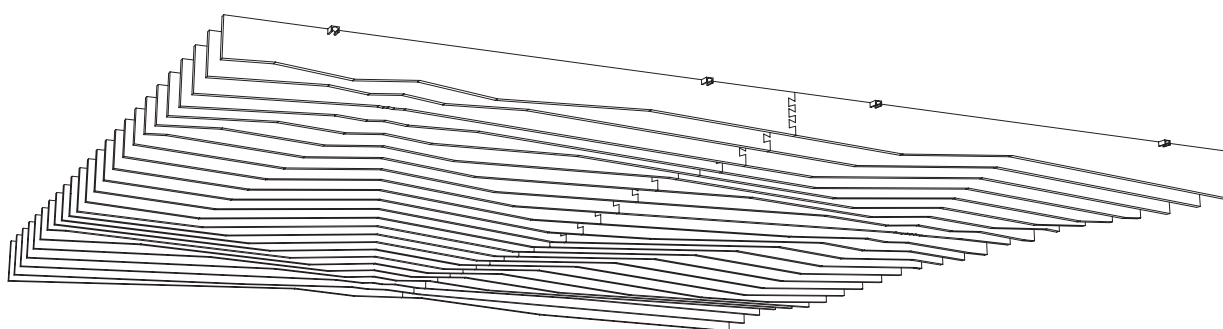

Bespoke Baffle

Product Family Overview


3 Bespoke Wave Baffles



Customizable product


713.24.11.000.00 - Baffle Wave Sine (H150-250, S200) (H5.90"-9.84", S7.87")

713.24.31.000.00 - Baffle Wave Sine (H150-250, S300) (H5.90"-9.84", S11.81")

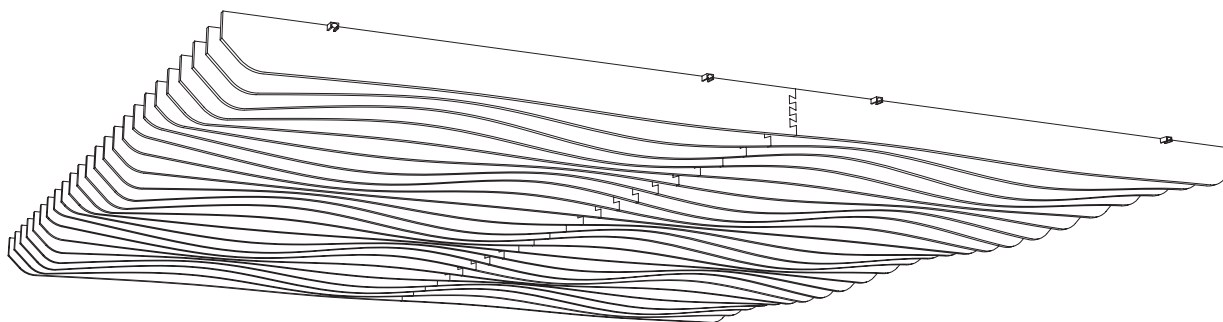


713.24.12.000.00 - Baffle Wave Ripple (H150-250, S200) (H5.90"-9.84", S7.87")

713.24.32.000.00 - Baffle Wave Ripple (H150-250, S300) (H5.90"-9.84", S11.81")

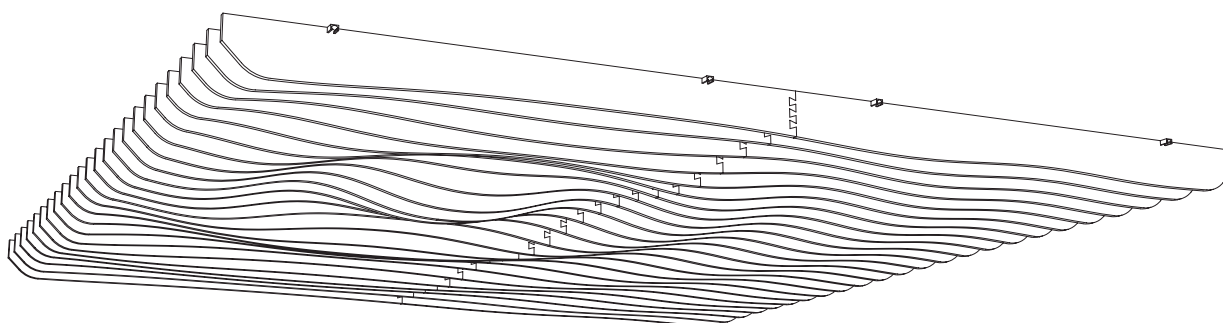

713.24.13.000.00 - Baffle Wave Morph (H150-250, S200) (H5.90"-9.84", S7.87")

713.24.33.000.00 - Baffle Wave Morph (H150-250, S300) (H5.90"-9.84", S11.81")

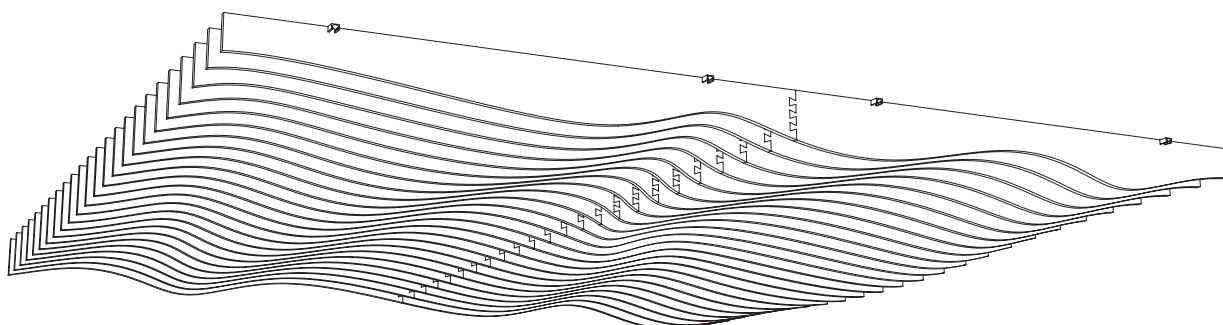

Bespoke Baffle


Installation Overview



Extended document available

1 Verify and organize


Verify all delivered elements and organize them based on the included labeling of each part and the supplied drawings.



A-1_1	SPACER	A-1_2
A-2_1	SPACER	A-2_2
A-3_1	SPACER	A-3_2
A-4_1	SPACER	A-4_2
A-5_1	SPACER	A-5_2



2 Install mounting hardware

Measure, mark and fix suspension hardware to your ceiling.

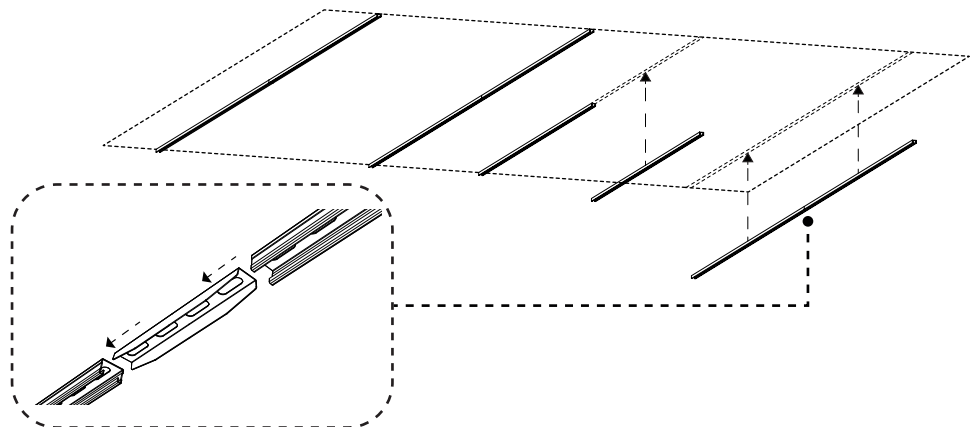


3 Install baffles

Fix baffle segments to mounting hardware and connect them together using the dovetail joints.

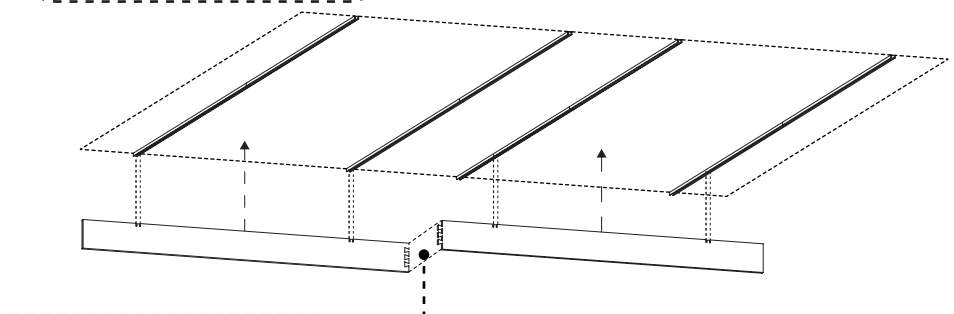

4 Repeat until done

Repeat Step 3, installing one baffle row at a time, and using the supplied Spacer Element to keep always the same spacing.

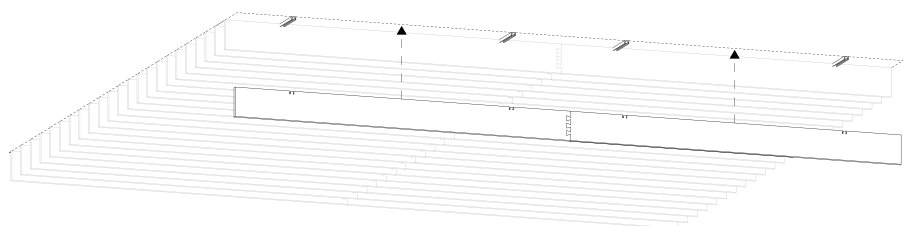

Bespoke Baffle

Planning Considerations



Extended document available

When planning the addition of a Bespoke Ceiling Baffle System to your space, please consider the following aspects.

1 Project Area

Check and verify the project area where the Ceiling Baffle System will be installed. This will allow us to provide you with an accurate quote.

2 Reverse Ceiling Plans


Verify if RCP drawings for the space are available. This will help plan for any obstacles like columns and air-ducts that might collide with the Baffles.

3 Additional considerations



Consider access to high windows and doors.

Verify the type of material to which the support elements will be mounted.


Plan for providing min. 100mm (4") safe space distance from Baffles to other elements



Consider possible cutouts for the air ducts.



The provided strut tracks might need to be cut to measure on site.

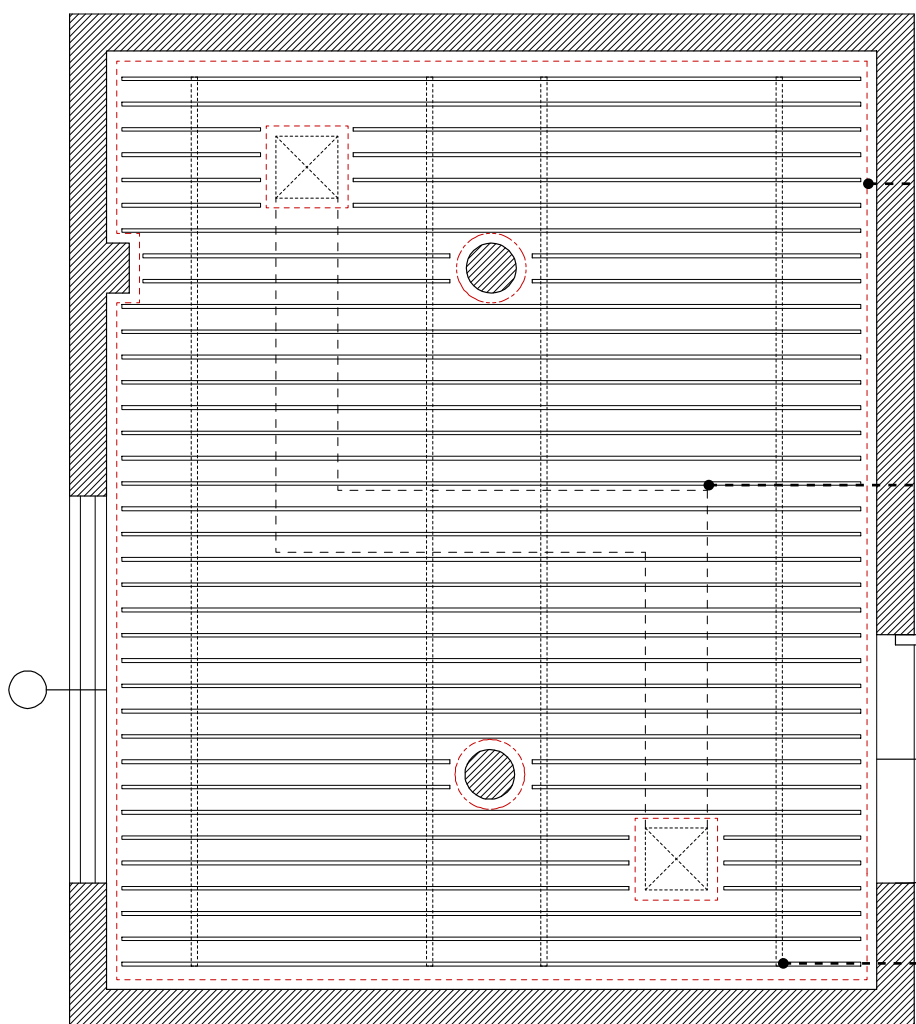

RCP drawing example

Bespoke Baffle Straight



Dynamic Zoning - Parametric Design Service

Reflecting your floor plan zoning onto a ceiling is now easier than ever. Thanks to our **Dynamic Zoning** Parametric Design Service you can define multiple areas for baffle height articulation within the continuous baffle run. Just provide our consultant with a floorplan with designated zones and we will take care of the rest.

For more information please [contact](#) our consultants.

EXAMPLE IMPLEMENTATION:

■ Open Office - 250 ■ Hallway - 200 ■ Reception - 150 ■ Meeting Room - 350

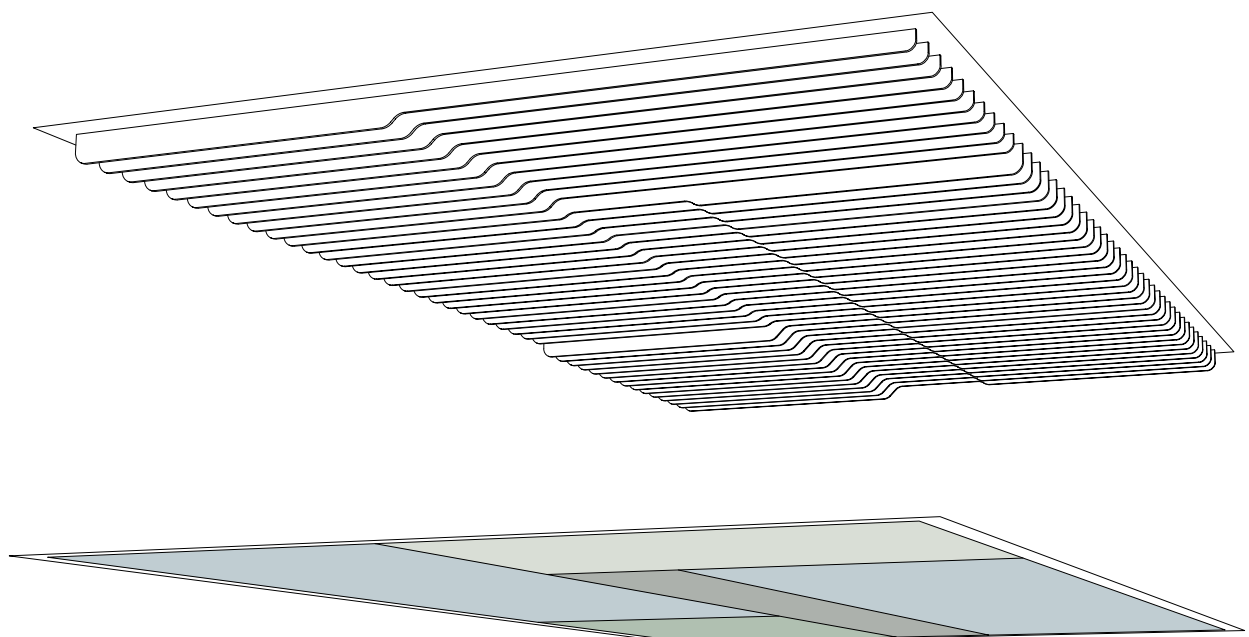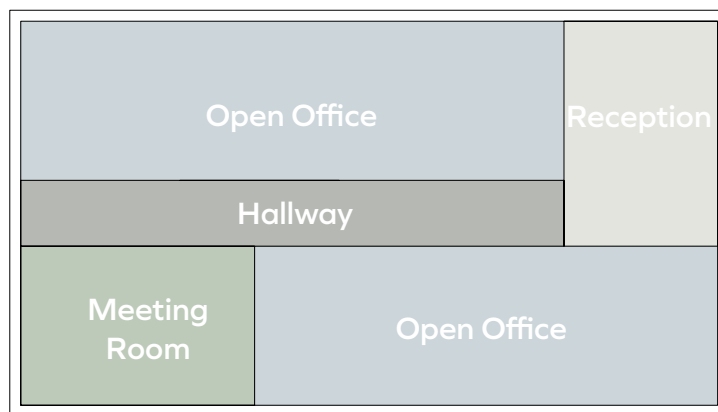

ARCHISONIC® Felt Colours



Name	Snow White	Milk	Cloud	Gull	Smoke	Ground	Charcoal	Slate	Raven
Code	500	404	103	144	442	108	542	444	550
NCS	S 0300-N	S 0502-Y	S 1002-B	S 2502-Y	S 3005-R80B	S 5005-Y20R	S 7502-B	S 4500-N	S 8500-N

Name	Nordic Pine	Grove	Fern	Moss	Spearment	Ice Blue	Succulent	Deep Sea	True Navy
Code	311	317	180	439	706	304	712	918	194
NCS	S 5030-G10Y	S 7020-G30Y	S 6010-G90Y	S 2040-G40Y	S 1010-B90G	S 0510-B	S 3020-B30G	S 5020-R90B	S 8005-B

Name	Lichen	Linen	Shell Pink	Jute	Warm Stone	Terracotta	Soft Coral	Honeycomb	Sunshine
Code	160	107	102	920	105	239	516	139	846
NCS	S 4005-Y	S 1505-Y30R	S 0510-R30B	S 3010-Y30R	S 3010-Y50R	S 4040-Y70R	S 2020-Y90R	S 2050-Y20R	S 1040-Y10R

Name	Garnet	Hot Pink	Poster Red	Electric Orange	Winter Sky	Pacific Ocean	Midnight	Grape	Marine Blue
Code	724	140	662	464	410	432	810	540	864
NCS	S 5040-R10B	S 2060-R20B	S 1080-R	S 0580-Y70R	S 2020-R90 B	S 3040-B	S 7020-R70B	S 5040-R40B	S 4050-R70B

These NCS codes are the closest visual match available and may not be exact to blended fibres.

ARCHISONIC®

Colours

Experience our ARCHISONIC® Felt material with a stunning selection of 36 colours across 8 distinct families, thoughtfully curated by *Colour Hive* in London. Effortlessly combine colours harmoniously to suit your preferences. Discover more in our Materials brochure and order your free sample box today.

Colour fastness

Class 6

ISO 105-B02:A1

Order a free sample box



ARCHISONIC® Felt

Material Specification

Product Name	ARCHISONIC® Felt	
Content	100% PET (60% certified post-consumer content)	
Thickness¹	12mm (0.47")	24mm (0.94")
Max. Size	1200x2800mm (47"x110")	1800x2400mm (70"x94")
Acoustic²	ASTM: NRC=0.6 ISO: α_w =0.65	ASTM: NRC=0.9 ISO: α_w =0.95
Density¹	2400 g/m ² (0.49 lbs/ sqft)	4000 g/m ² (0.82 lbs/sqft)
Colour Fastness	Class 6 ISO 105-B02:A1	
Colour	36 colours (see ARCHISONIC® Felt Colour page for more information)	
Maintenance	For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.	
Production Lead time³	21 days	
Fire Rating	DIN EN 13501-1: B-s1, d0	ASTM E84 Class A
VOC Emission	28 Days French Regulation A+ ASTM E84 Pass Breeam® (International, UK, NL, SE, NOR) Exemplary CDPH (CDPH/EHLB/Standard Method V1.2) Pass	
Certifications	Declare label, Cradle to Cradle, UL Environmental Product Declaration, Member of US Green Building Council, Ecobau 1st Priority, Climmate-KIC, VOC emissions in LEED EQ credit (low-emitting products), SCS Recycled Content	
Durability	Contract	

1 - all values are nominal 2 - measured with 300mm air cavity 3 - depending on the location and type of product




Climate-KIC is supported by the
EIT, a body of the European Union



Bespoke Baffle

Acoustic Performance



Testing Standards

ISO 354:2003	Acoustics — Measurement of sound absorption in a reverberation room
ISO 11654:1997	Acoustics — Sound absorbers for use in buildings — Rating of sound absorption
ISO 20189:2018	Acoustics — Screens, furniture and single objects intended for interior use — Rating of sound absorption and sound reduction of elements based on laboratory measurements
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests

Acoustic Test Results


	α_w	SAA	NRC
Ceiling Baffle, 100mm height, spaced 200mm on center	0.35 (H)	0.43	0.45
Ceiling Baffle, 200mm height, spaced 200mm on center	0.70 (MH)	0.96	0.95
Ceiling Baffle, 100mm height, spaced 300mm on center	0.30 (H)	0.27	0.25
Ceiling Baffle, 200mm height, spaced 300mm on center	0.50 (MH)	0.60	0.60

The NRC rating is calculated as the average of the absorption coefficients measured at frequencies of 250Hz, 500Hz, 1000Hz and 2000Hz and round to the nearest 0.05. SAA rating is calculated as the average of the sound absorption coefficients of a material for the twelve one-third octave bands from 200Hz through 2500Hz and rounded off to the nearest 0.01.

Acoustic Performance

Frequency (Hz)		125	250	500	1000	2000	4000
Ceiling Baffle, 100mm height, spaced 200mm on center ¹	α_p	0.05	0.15	0.30	0.50	0.75	0.90
Ceiling Baffle, 200mm height, spaced 200mm on center ¹	α_p	0.15	0.45	0.70	1.10	1.60	1.75
Ceiling Baffle, 100mm height, spaced 300mm on center ¹	α_p	0.05	0.10	0.20	0.35	0.45	0.55
Ceiling Baffle, 200mm height, spaced 300mm on center ¹	α_p	0.10	0.30	0.45	0.70	1.00	1.10

1 - Measured with 200mm airgap between the solid backing and the baffle surface

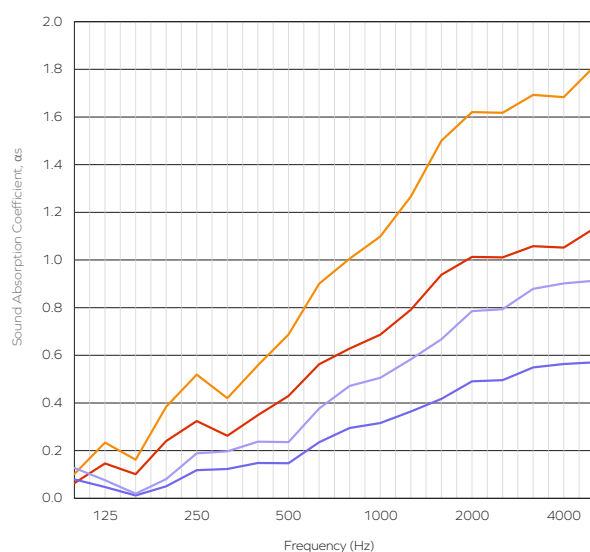


- Ceiling Baffle, 100mm height, spaced 200mm on center
- Ceiling Baffle, 200mm height, spaced 200mm on center
- Ceiling Baffle, 100mm height, spaced 300mm on center
- Ceiling Baffle, 200mm height, spaced 300mm on center

The table represents the practical sound absorption coefficient (α_p) in accordance with ISO 11654. The graph represents the sound absorption coefficients (α_s) in the third octave band center frequencies in accordance with ISO 354. The sound absorption coefficient presented is calculated from the total surface area covered by the test sample. The results provided are limited to the specific configuration, and any modifications to the configuration will affect the resulting values.

Bespoke Baffle

Reference Projects

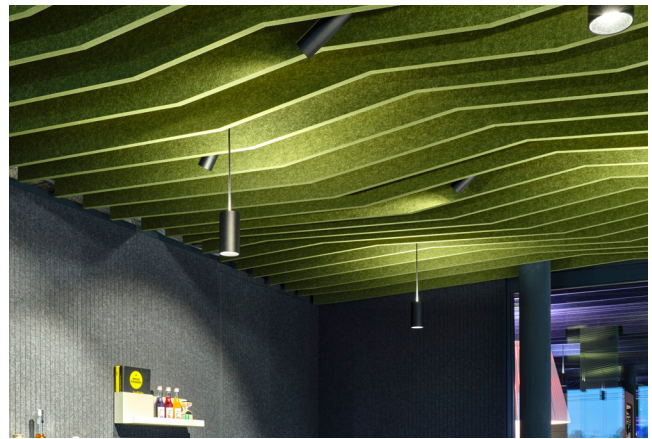

Bespoke Baffle

Additional Information

Online Resources

A variety of resources are available online for all of our products. Please visit the product's page for more information.



CAD files



Spec sheets and
Installation Guide



Colour families



Instruction
videos



Associated
products specs.

Ordering Process

Our experienced team of Project Consultants will guide and support you throughout the order process. We fulfill the majority of our orders in as little as 21 days¹ from your first point of contact, allowing you to focus on what truly matters to you.



Contact our
consultant

Quote¹

48h



Order Confirmation

Production¹

14-21 days



Dispatch

Transit

location based



Delivery

Contact Us

Ready to make an impact? We are just an email or call away to discuss your project and answer any question.




+41 41 244 14 00



connect@impactacoustic.com



Online form

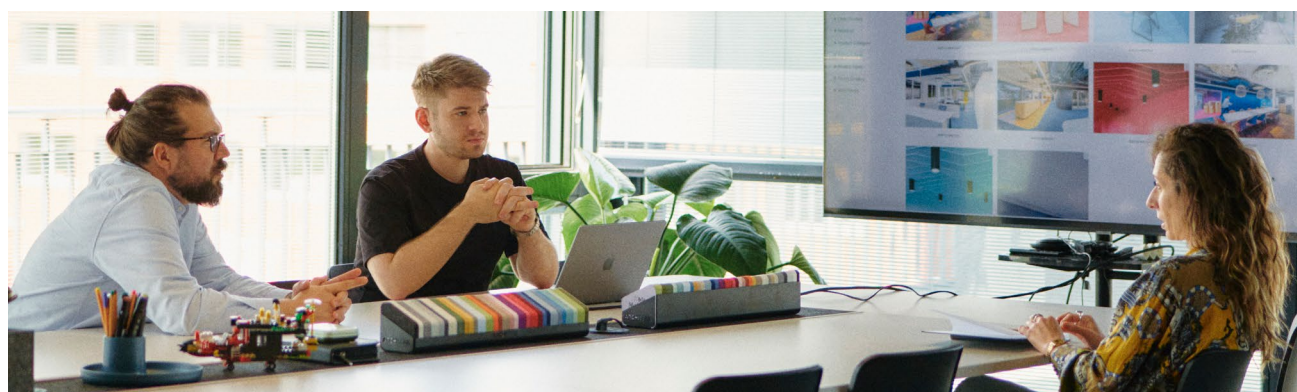

¹ - Quote and Production times may vary.

IMPACT ACOUSTIC®
Bespoke Baffle rev.02 - 12.08.25

(Switzerland)
(USA)
(Philippines)

connect@impactacoustic.com
usa@impactacoustic.com
philippines@impactacoustic.com

(+41) 41 244 14 00
(+1) 619 378 2100
(+63) 285 80 02 50

#WeMakeAnImpact

**#We
Make An
Impact**

connect@impactacoustic.com | www.impactacoustic.com